

COAXIAL VAPOR RECOVERY HOSE

HEALY™ brand ¾" coaxial hose is designed for use in vapor recovery refueling applications to improve air quality and emissions. This premium hose provides long-lasting service with multi-fuel compatibility.



HIGHLIGHTS

- Premium abuse-resistant cover compound with enhanced ozone resistance for service longevity.
- Coaxial HEALY™ straight thread (swivel and non-swivel), metric M-34 thread (swivel and non-swivel) and balance-type swivel thread fitting options available.

ORDERING INFORMATION

Complete model numbers have a specific order and are created using the following guidelines:

75B - A B - C D

75B = ¾" Vapor Recovery Hose

A = Hose Length Feet

Use two-digit format

B = Hose Length Inches

0 = None

5 = 6" (for curb length hoses only)

8 = 8" (for whip length hoses only)

C and D = End Fitting Options

F2 = Fixed HEALY™ straight thread

S2 = Swivel HEALY™ straight thread

F3 = Fixed metric M-34 thread

S3 = Swivel metric M-34 thread

S4 = Swivel balance-type thread

Curb hose example 1: 75B-115-F3F2 = ¾" vapor recovery hose, 11 feet 6 inches length, one fixed metric M-34 thread fitting and one fixed HEALY™ straight thread fitting.

Whip hose example 1: 75B-008-F3F2 = ¾" vapor recovery hose, 0 feet 8 inches length, one fixed metric M-34 thread fitting and one fixed HEALY™ straight thread fitting.

Replacement Parts

Model	Description
HB-2	Hose end O-ring for S2/F2 fitting, large
6094	Hose end O-ring for S3/F3 fitting, large
516	Hose end O-ring for S4 fitting, large
HB-4	Vapor end quad ring (2 required per adapter)
291	Vapor end O-ring, small (2 required per adapter)

SPECIFICATIONS

- Tube: Nitrile synthetic rubber with fluorothermoplastic barrier layer
- Cover: Synthetic rubber
- Reinforcement: Single wire braid
- End fittings: Stainless steel


Approvals/Certifications

- Meets UL330
- UL Listed (Swivel and Fixed)
- CARB certified

End Fitting Options

See following page for hose fitting Break Away Valve configuration options.

- 1 Fixed HEALY™ straight thread (F2)
- 2 Swivel HEALY™ straight thread (S2)
- 3 Fixed metric M-34 thread (F3)
- 4 Swivel metric M-34 thread (S3)
- 5 Swivel Balance-type thread (S4)

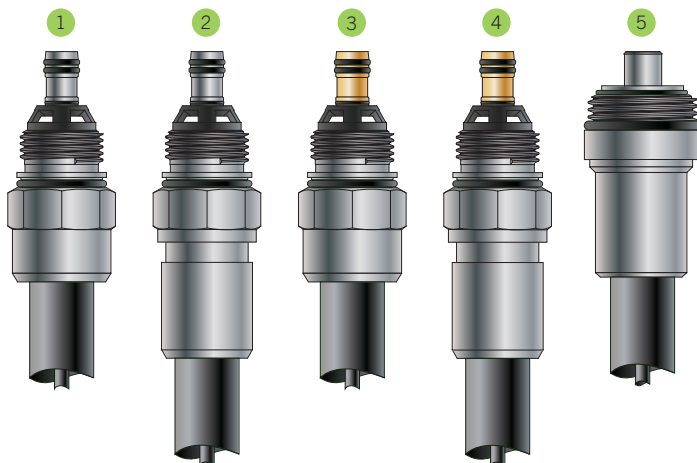

SPECIFICATIONS

Hose Fitting & Break Away Valve Configurations

